

# High Power Street Light



The Light Footprint High Power LED Street Lamp is elegantly designed, using leading components including;

Luxeon Rebel ES LED Luminous Source – providing excellent luminous efficiency, long-lasting stability and includes individual electrostatic protection per component maximising protection.

Meanwell HLG drivers – delivering optimal operation stability, lifespan & performance.


Each luminaire offers easy assembly/disassembly, up to 95 LPW, IP66 & IK08 ratings, driver efficiency of 90%+, an estimated 100,000 hours operational life and a 5 year warranty.

Optical control (dimming) function is supported by either; Three in One (1-10V DC, PWM Signal or Resistance) or Timer.

Available in two colour options the innovative bracket allows for 6 installation options, 0°, 10° or 15° on the horizontal or 0°, 5° or 15° on the vertical. Further, each wattage can be ordered with a choice of four light distribution options, 1S, 2M, 3M or 5S.

## Technical Specification

Total Circuit Wattage	156W
Working Voltage	100–265VAC
Working Temperature	-30°C/+55°C
Beam Angle	120°
Estimated Life Span	100,000hrs
CRI	>80
IP Rating	IP66
Power Factor	>0.90

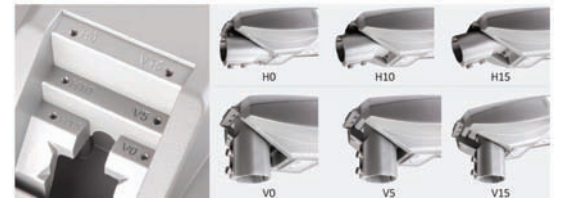

5

Year Warranty

Product Code	Size (LxWxD)	Colour Options	Lens Options	Max Lumen	TCW
HPSL35CW	431mm x 316mm x 136mm	5650-6300K (CW)	1S / 2M / 3M / 5S	3325	35W
HPSL65CW	504mm x 316mm x 136mm	5650-6300K (CW)	1S / 2M / 3M / 5S	6175	65W
HPSL100CW	577mm x 316mm x 136mm	5650-6300K (CW)	1S / 2M / 3M / 5S	9500	100W
HPSL135CW	650mm x 316mm x 136mm	5650-6300K (CW)	1S / 2M / 3M / 5S	12825	135W
HPSL165CW	723mm x 316mm x 136mm	5650-6300K (CW)	1S / 2M / 3M / 5S	15675	165W
HPSL200CW	796mm x 316mm x 136mm	5650-6300K (CW)	1S / 2M / 3M / 5S	19000	200W

Other product options (lead-time & minimum order quantity applies)

Warm White 3800–4100K (WW) / Daylight White 5000–5650K (DW)

Also available in black

Accessories

Optical Control