


# Commercial Downlights

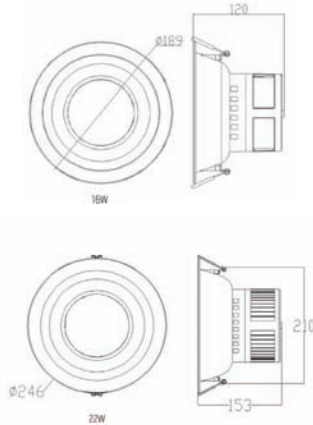

The Light Footprint Commercial Downlight range is designed to offer a superior alternative to the traditional compact fluorescent fittings (eg twin 18W or 26W G24).

The downlights are manufactured to the highest possible standards allowing for optimal levels of light output combined with efficient heat management and maximum longevity.

These luminaries are equipped with isolated drivers which ensure that any exposed metallic parts are free from electric current, over-load, power surge and overheat protection for added safety.

## Technical Specification

Total Circuit Wattage	16W/22W
Working Voltage	100-265VAC
Working Temperature	-25°C/+45°C
Beam Angle	90°
Estimated Life Span	50,000hrs L80
CRI	>80
IP Rating	IP42
Power Factor	0.94

## Test Standards

EN60598-2-2:1997
EN60598-1:2008+A11:2009
EN61347-2-13:2006
EN61347-1:2007
EN62384:2006
EN55015: 2006 + A2: 2009
EN61547: 2009
EN61000-3-2:2006+A2:2009
EN61000-3-3: 2008



**5** Year Warranty L80

Product Code	Size	Colour	Lumen	TCW
CD16NW	D.189mm / Cut-out 168mm	Natural White 4500K (NW)	950	16W
CD16DW	D.189mm / Cut-out 168mm	Daylight White 5500K (DW)	1000	16W
CD22NW	D.246mm / Cut-out 215mm	Natural White 4500K (NW)	1425	22W
CD22DW	D.246mm / Cut-out 215mm	Daylight White 5500K (DW)	1500	22W

## Accessories

4W 3hr Emergency Lighting Unit (4.2)