


Multi Purpose Floods

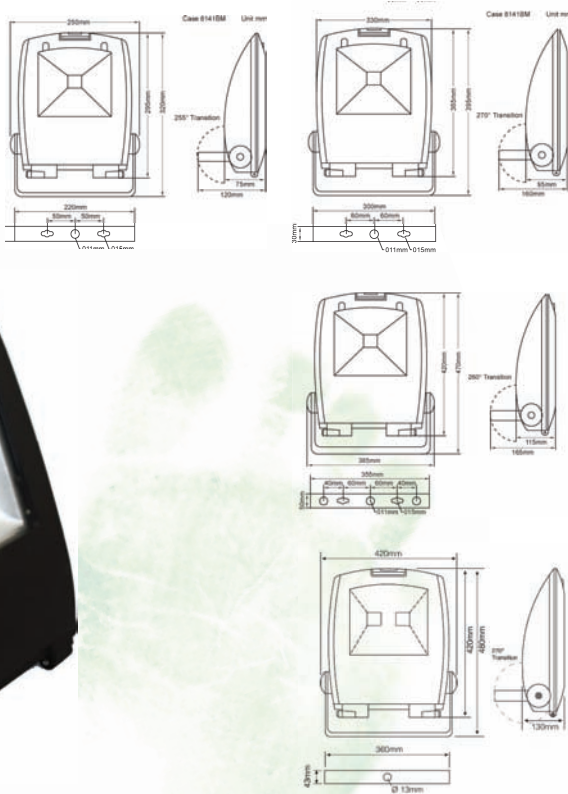

The Light Footprint Multi Purpose LED Flood Ranges represent the next generation of LED exterior lighting.

This product range is assembled using high quality multi-core LED chips combined with a hi-intensity, prismatic glass cover which reduces glare but offers a crisp, uniformed light output.

To ensure performance and for added safety the Light Industrial LED Floods are manufactured with isolated drivers & IP65 protection as standard.

The Light Footprint Light Industrial LED Floods offer savings of up to 70% against traditional flood lighting options.

Technical Specification

Total Circuit Wattage 35W/56W/88W

Working Voltage 100-265VAC

Working Temperature -10°C/+35°C

Beam Angle 120°

Estimated Life Span 50,000hrs L80

CRI >50

IP Rating IP65

Power Factor >0.90

Test Standards

EN 55015: 2006+A1: 2007+A2: 2009

EN 61547: 2009

EN 61000-3-2: 2006+A1: 2009+A2: 2009

EN 61000-3-3: 2008



5 Year Warranty L80

Product Code	Size (LxWxD) excluding bracket	Colour	Lumen	TCW
MPFL30DW	295mm x 250mm x 75mm	Daylight White 5800K (DW)	2640	35W
MPFL50DW	330mm x 365mm x 95mm	Daylight White 5800K (DW)	3850	56W
MPFL80DW	385mm x 420mm x 115mm	Daylight White 5800K (DW)	6160	88W
MPFL120DW	420mm x 480mm x 130mm	Daylight White 5800K (DW)	9850	130W