

# Smart LED Commercial Downlights



The Light Footprint SMART Commercial Downlight range is designed to offer a superior alternative to the traditional compact fluorescent fittings (eg twin 18W or 26W G24).

The downlights are manufactured to the highest possible standards allowing for optimal levels of light output combined with an anodised aluminium heat sink ensuring efficient heat management and maximum longevity.

These luminaires are equipped with 'quick connect' isolated drivers which ensure that any exposed metallic parts are free from electric current, over-load, power surge and overheat protection for added safety.

These luminaires are compatible with trailing edge dimmers.

## Technical Specification

Total Circuit Wattage 16W / 22W / 35W

Working Voltage 100-265VAC

Working Temperature -20°C/+40°C

Beam Angle 160°

Estimated Life Span 50,000hrs L80


CRI >80

IP Rating IP44

Power Factor >0.94



## Driver Connection

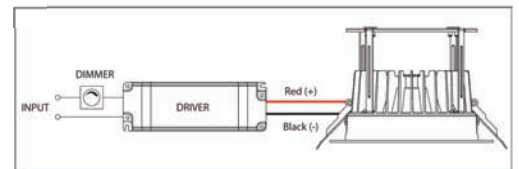

**5** Year Warranty L80

**DIMMABLE (TRAC)**

| Product Code | Size                    | Depth | Colour                   | Lumen  | TCW | Dimmable |
|--------------|-------------------------|-------|--------------------------|--------|-----|----------|
| CD16NW5D     | D.150mm / Cut-out 125mm | 103mm | Natural White 4000K (NW) | 1350lm | 16W | YES      |
| CD22NW7D     | D.195mm / Cut-out 148mm | 70mm  | Natural White 4000K (NW) | 2000lm | 22W | YES      |
| CD35NW8D     | D.225mm / Cut-out 176mm | 70mm  | Natural White 4000K (NW) | 3000lm | 35W | YES      |

**Other product options** (lead-time & minimum order quantity applies)

Warm White 3000K (WW)